

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 February 2004 (26.02.2004)

PCT

(10) International Publication Number
WO 2004/017280 A1

(51) International Patent Classification⁷: **G09F 3/03,**
E05B 39/02

(21) International Application Number:
PCT/IB2003/002821

(22) International Filing Date: 16 July 2003 (16.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002/6585 16 August 2002 (16.08.2002) ZA

(71) Applicant and

(72) Inventor: ANDERSON, Michael, Stuart [ZA/ZA]; Plot
141, 2nd Road, Chartwell, 2194 Randburg (ZA).

(74) Agents: DONALD, HEATHER, June et al.; Spoor &
Fisher, PO Box 41312, 2024 Craighall (ZA).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.



(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: PADLOCK

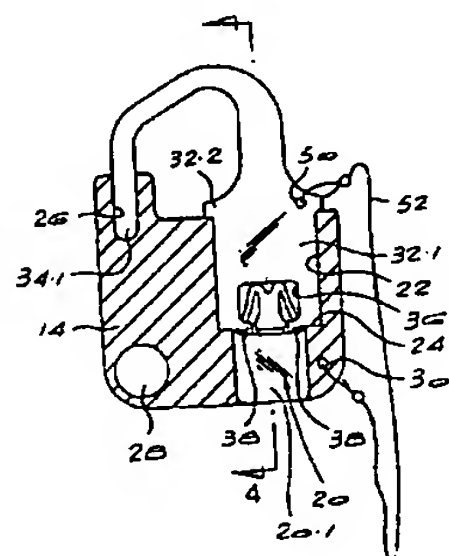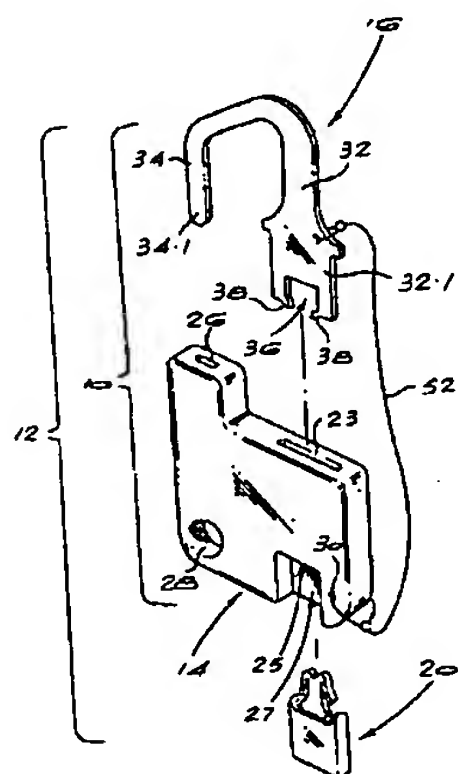

(57) **Abstract:** The invention concerns a tamper-evident padlock and padlock combina-
tion. The padlock (10) has a moulded plastics lock body (14) which includes an open-
ended passage (22) and an opening (26) spaced from the passage. There is also a hasp
(16) which has first and second spaced apart legs (32, 34). An end (32.1) of the first leg
can be located in the passage through a first end thereof while the end of the second leg
can be located simultaneously in the opening. The end of the first leg in the passage can
then be engaged by a breakable seal (20) which is inserted into the passage through the
opposite end of the passage, in order to lock the hasp relative to the lock body. The pad-
lock combination (12) comprises the padlock (10) and the seal (20) in combination.

WO 2004/017280 A1